

Quickstart 2

# Quickstart on GCP

**Date of Publish:** 2018-09-14



<http://docs.hortonworks.com>

# Contents

<b>Prerequisites on GCP.....</b>	<b>3</b>
Cloud SDK.....	3
GCP APIs.....	3
Service account.....	4
Browser.....	5
<b>Launch Cloudbreak from the quickstart template on GCP.....</b>	<b>6</b>
<b>Next steps.....</b>	<b>8</b>
<b>Delete Cloudbreak on GCP.....</b>	<b>9</b>

## Prerequisites on GCP

Prior to launching Cloudbreak, you must meet these prerequisites.

### Cloud SDK

In order to use the Cloud Deployment Manager, you must install the Google Cloud SDK on your machine. The SDK contains the gcloud CLI tool, which is used to deploy Cloudbreak.

For instructions, refer to [Installing Google Cloud SDK](#) in the Google Cloud documentation. Make sure to perform all of the steps and validate that the gcloud command works on your computer. Only after validating, proceed to the next step.

#### Related Information


[Installing Google Cloud SDK \(GCP\)](#)

### GCP APIs


In order to launch Cloudbreak from a template, you must enable the Compute Engine API and the Cloud Runtime Configuration API services.

Steps

1. In GCP web console, from the services menu, select APIs & Services:

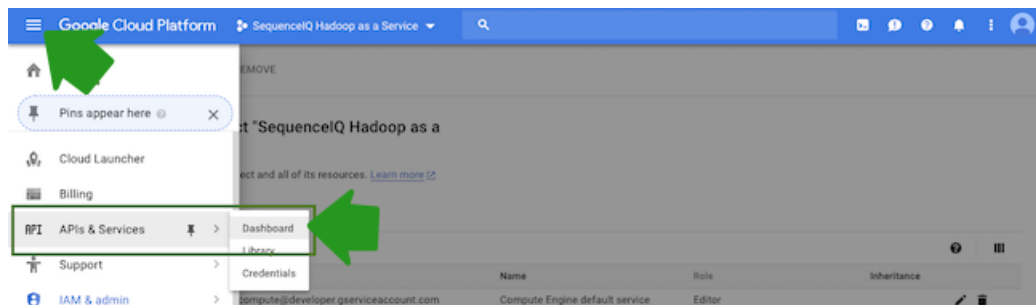


2. Click on Enable APIs and services:

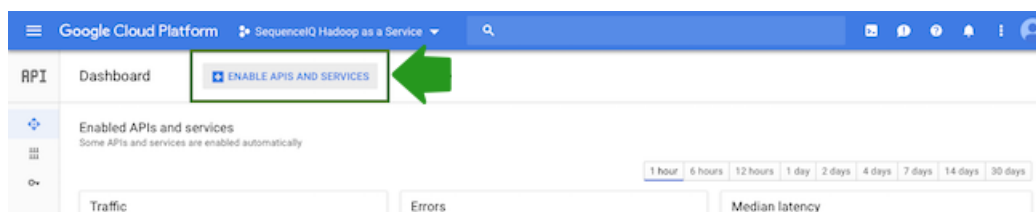


3. On this page:

- In the filter, type “Compute Engine API”.
- Click on the corresponding tile to navigate to the API details

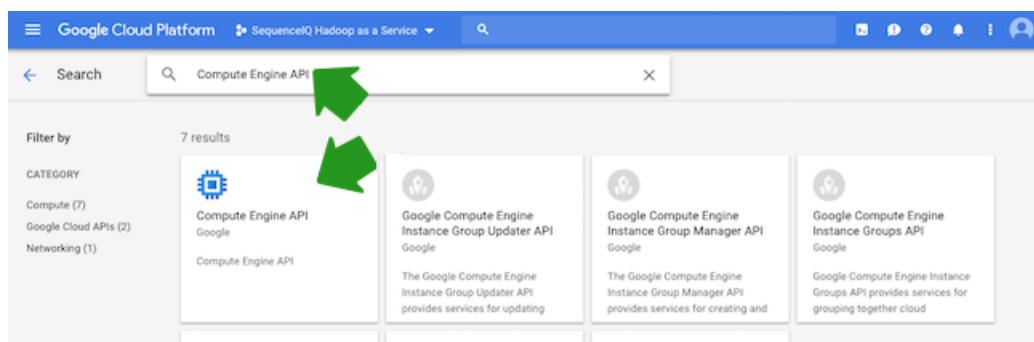

- Click on the Enable button. Once the API has been enabled you should see:

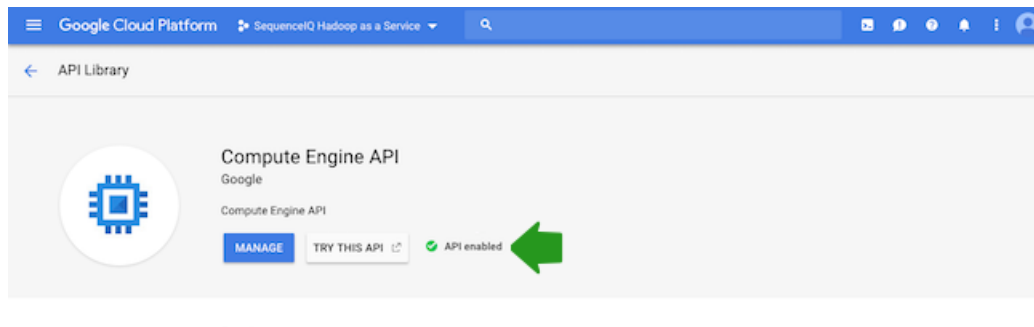

- Perform the same steps for the “Cloud Runtime Configuration API”.

## Service account


In order to launch Cloudbreak from a template, you must create a service account that has the following roles.

Google service	Roles to select	Description
Computer Engine	<ul style="list-style-type: none"> <li>• Compute Image User</li> <li>• Compute Instance Admin (v1)</li> <li>• Compute Network Admin</li> <li>• Compute Security Admin</li> </ul>	This is required.
Storage	<ul style="list-style-type: none"> <li>• Storage Admin</li> </ul>	This is required.
Other	<ul style="list-style-type: none"> <li>• Cloud RuntimeConfig Admin</li> </ul>	This is required.


If you already have a service account and a JSON key but you need to update the permissions for the account, you can do it from IAM & admin > IAM. If you need to create a service account, follow these steps.

Steps

- To create a service account In GCP web console, from the services menu, select IAM & admin > Service account:

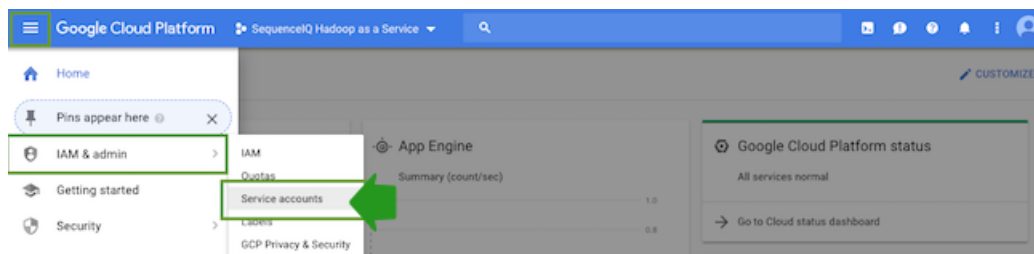

- Click on Create service account:

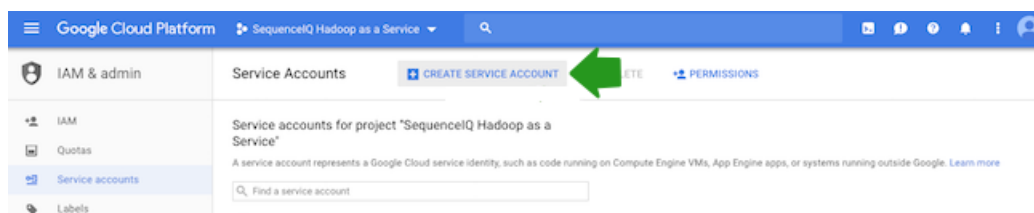

### 3. Provide the following:


- Enter the Service account name.



#### Note:

This will determine your service account email. Make a note of this service account email. You will need to provide it when creating a Cloudbreak credential.

- Under Role, select the roles described above.
- Under Key type, select JSON.

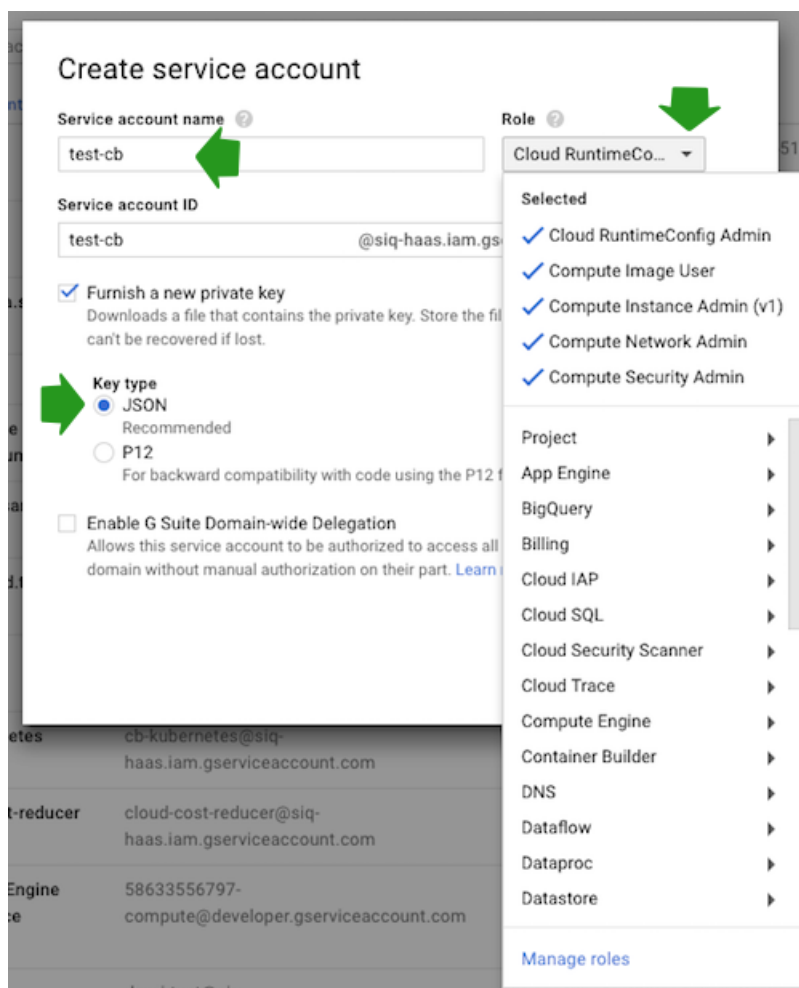

### 4. Click Create.

5. The JSON key will be downloaded on your machine. You will need it later to create a Cloudbreak credential.

## Browser

In order to access Cloudbreak web UI, you should use one of the following supported browsers: Chrome, Firefox, or Safari.

## Launch Cloudbreak from the quickstart template on GCP

Launch Cloudbreak from an Cloud Deployment Manager template by using the following steps. This is the quickstart deployment option.

### Steps

1. Log in to your GitHub account.
2. Run the following command to download the following Hortonworks repo onto your computer and check out the release branch:

```
git clone https://github.com/hortonworks/cbd-quickstart
cd cbd-quickstart
git checkout 2.8.0
```

3. On your computer, browse to the `cbd-quickstart/gcp`.
4. Open the `vm_template_config.yaml` file in a text editor.
5. Edit the file by updating the property values:



#### Note:

Do not edit any other parameters in the `vm_template_config.yaml` file.

Parameter	Description	Default
region	The GCP region in which you would like to launch Cloudbreak. You can launch Cloudbreak and provision your clusters in all regions supported by GCP.	us-central-1
zone	The GCP region's zone in which you would like to launch Cloudbreak. You can launch Cloudbreak and provision your clusters in all regions supported by GCP.	us-central1-a
instance_type	Select the VM instance type.	n1-standard-4
ssh_pub_key	Paste your SSH public key.	...
os_user	Enter the name of the user that you would like to use to SSH to the VM.	cloudbreak
user_email	Enter the email address that you would like to use to log in to Cloudbreak.	admin@cloudbreak.com
user_password	Enter the password that you would like to use to log in to Cloudbreak.	cloudbreak
service_account_email	The email for the service account created in prerequisites.	...

6. Save the changes on your local machine.
7. Run the following command to create a new deployment:

```
gcloud deployment-manager deployments create cbd-deployment --config=/
path/to/file/cbd-quickstart/gcp/vm_template_config.yaml
```

For example:

```
gcloud deployment-manager deployments create cbd-deployment --config=/
Users/youruser/Documents/cbd-quickstart/gcp/vm_template_config.yaml
```

8. Once your deployment has finished, you will see the following:

```
gcloud deployment-manager deployments create cbd-deployment --config=/
Users/youruser/Documents/cbd-quickstart/gcp/vm_template_config.yaml
Waiting for create
operation-1527749967574-56d7b021f73f1-773609ee-060d4332...done.
Create operation operation-1527749967574-56d7b021f73f1-773609ee-060d4332
completed successfully.
NAME                                     TYPE                                     STATE
  ERRORS  INTENT
cbd-deployment-default-route-1  compute.v1.route                        COMPLETED
[]
cbd-deployment-network          compute.v1.network                      COMPLETED
[]
cbd-deployment-startup-config  runtimeconfig.v1beta1.config          COMPLETED
[]
cbd-deployment-startup-waiter  runtimeconfig.v1beta1.waiter          COMPLETED
[]
cbd-deployment-subnet          compute.v1.subnetwork                  COMPLETED
[]
cbd-deployment-vm              compute.v1.instance                    COMPLETED
[]
firewall-cbd-deployment        compute.v1.firewall                    COMPLETED
[]
OUTPUTS      VALUE
deploymentIp 35.224.36.96
```


9. The last output should be the the deploymentIp. Copy the IP address and paste it in the browser so that you can log in to the Cloudbreak web UI.
10. Paste the link in your browser's address bar.

- a. Confirm the security exception to proceed to the Cloudbreak web UI.


The first time you access Cloudbreak UI, Cloudbreak will automatically generate a self-signed certificate, due to which your browser will warn you about an untrusted connection and will ask you to confirm a security exception.

Browser	Steps
Firefox	Click Advanced > Click Add Exception... > Click Confirm Security Exception
Safari	Click Continue
Chrome	Click Advanced > Click Proceed...

- b. The login page is displayed:

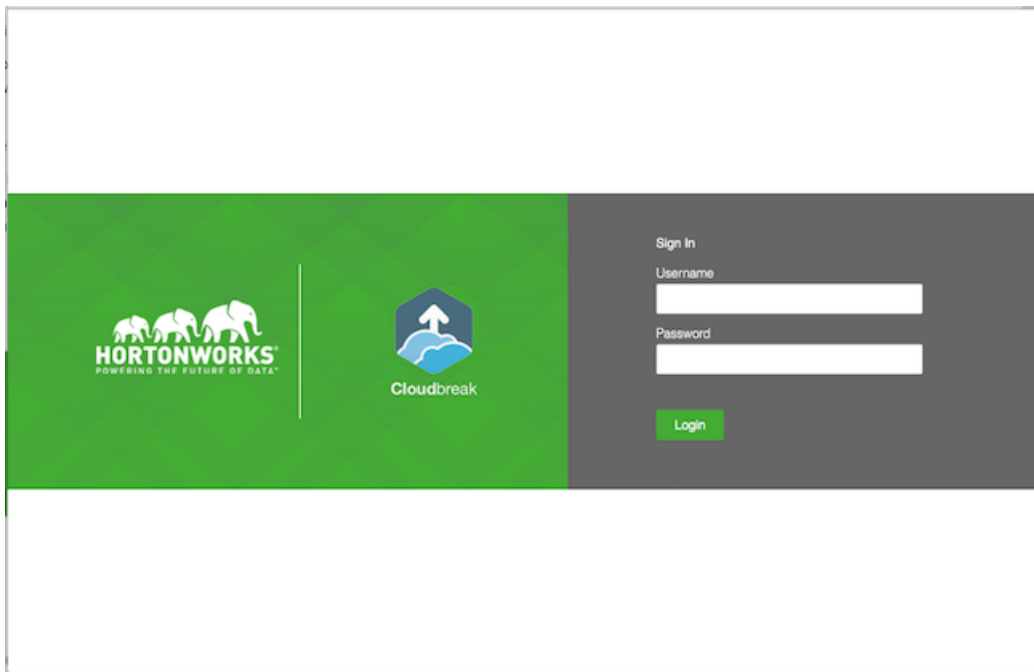

- c. Log in to the Cloudbreak web UI using the credential that you configured in the CloudFormation template.
- d. Upon a successful login, you are redirected to the dashboard:

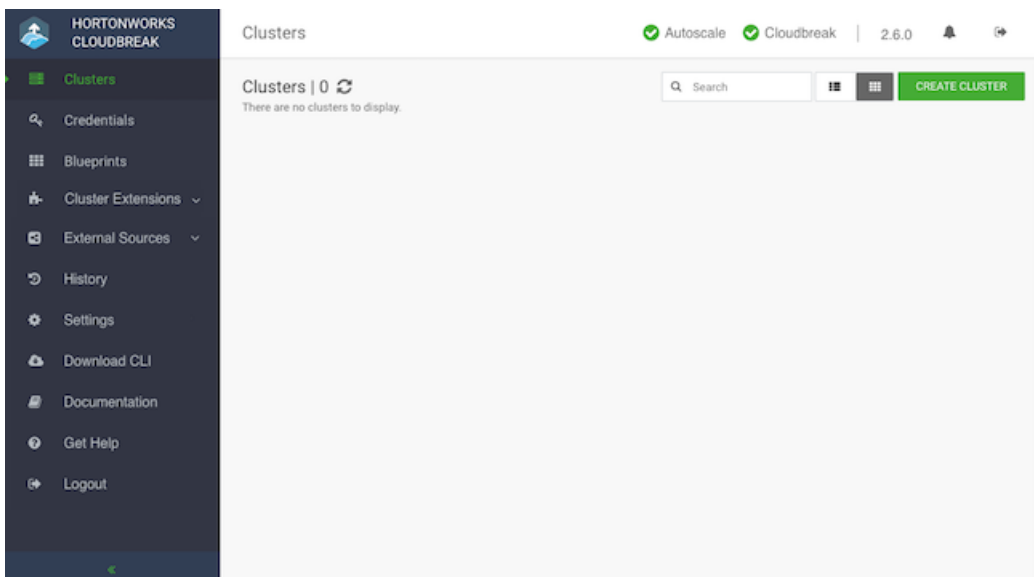

### Related Information

[Cloud locations \(GCP\)](#)

[Machine types \(GCP\)](#)

[Storage options \(GCP\)](#)

## Next steps

After launching Cloudbreak, you must configure a Cloudbreak credential. After you've created one, you can start creating clusters.



### Related Information

[Create a Cloudbreak credential on GCP](#)

## Delete Cloudbreak on GCP

There are two ways to delete a previously created Cloudbreak deployment from your Google Cloud account.

### Option 1: Using the gcloud CLI

You can delete the deployment by using the following gcloud CLI command:

```
gcloud deployment-manager deployments delete deployment-name -q
```

For example:

```
gcloud deployment-manager deployments delete cbd-deployment -q
```

### Option 2: From the Google Cloud console

You can delete the deployment from the Google Cloud console in your browser, from the Deployment Manager > Deployments:

