

HCP Prioritizing Threat Intelligence 1

Prioritizing Threat Intelligence

Date of Publish: 2018-10-15

<http://docs.hortonworks.com>

Contents

Prioritizing Threat Intelligence.....	3
Understanding Threat Triage Rule Configuration.....	3
Perform Threat Triage Using the Management Module.....	5
Perform Threat Triage Using the CLI.....	8
View Triaged or Scored Alerts.....	9

Prioritizing Threat Intelligence

Not all threat intelligence indicators are equal. Some require immediate response, while others can be addressed as time and availability permits. As a result, you must triage and rank threats by severity.

In HCP, you assign severity by associating possibly complex conditions with numeric scores. Then, for each message, you use a configurable aggregation function to evaluate the set of conditions and to aggregate the set of numbers for matching conditions. This aggregated score is added to the message in the `threat.triage.level` field.

Understanding Threat Triage Rule Configuration

The goal of threat triage is to prioritize the alerts that pose the greatest threat and need urgent attention. To create a threat triage rule configuration, you must first define your rules.

Each rule has a predicate to determine whether or not the rule applies. The threat score from each applied rule is aggregated into a single threat triage score that is used to prioritize high risk threats.

Following are some examples:

Rule 1	If a threat intelligence enrichment type <code>zeusList</code> is alerted, imagine that you want to receive an alert score of 5.
Rule 2	If the URL ends with neither <code>.com</code> nor <code>.net</code> , then imagine that you want to receive an alert score of 10.
Rule 3	For each message, the triage score is the maximum score across all conditions.

These example rules become the following example configuration:

```
"triageConfig" : {
  "riskLevelRules" : [
    {
      "name" : "zeusList is alerted"
      "comment" : "Threat intelligence enrichment type zeusList is alerted."
      "rule":
        "exists(threatintels.hbaseThreatIntel.domain_without_subdomains.zeusList)"
      "score" : 5
    }
    {
      "name" : "Does not end with .com or .net"
      "comment" : "The URL ends with neither .com nor .net."
      "rule": "not(ENDS_WITH(domain_without_subdomains, '.com') or
        ENDS_WITH(domain_without_subdomains, '.net'))" : 10
      "score" : 10
    }
  ]
  , "aggregator" : "MAX"
  , "aggregationConfig" : { }
}
```

You can use the `'reason'` field to generate a message explaining why a rule fired. One or more rules may fire when triaging a threat. Having detailed, contextual information about the environment when a rule fired can greatly assist actioning the alert. For example:

Rule 1

For hostname, the value exceeds threshold of value-threshold, receive an alert score of 10.

This example rule becomes the following example configuration:

```

"triageConfig" : {
  "riskLevelRules" : [
    {
      "name" : "Abnormal Value"
      "comment" : "The value has exceeded the threshold",
      "reason": "FORMAT('For '%s' the value '%d' exceeds threshold of '%d',
hostname, value, value_threshold)"
      "rule": "value > value_threshold",
      "score" : 10
    }
  ],
  "aggregator" : "MAX",
  "aggregationConfig" : { }
}

```

If the value threshold is exceeded, Threat Triage will generate a message similar to the following:

```

"threat.triage.score": 10.0,
"threat.triage.rules.0.name": "Abnormal Value",
"threat.triage.rules.0.comment": "The value has exceeded the threshold",
"threat.triage.rules.0.score": 10.0,
"threat.triage.rules.0.reason": "For '10.0.0.1' the value '101' exceeds
threshold of '42'"

```

where

riskLevelRules

This is a list of rules (represented as Stellar expressions) associated with scores with optional names and comments.

name	The name of the threat triage rule.
comment	A comment describing the rule.
reason	An optional Stellar expression that when executed results in a custom message describing why the rule fired.
rule	The rule, represented as a Stellar statement.
score	Associated threat triage score for the rule.

aggregator

An aggregation function that takes all non-zero scores representing the matching queries from riskLevelRules and aggregates them into a single score.

You can choose between:

MAX	The maximum of all of the associated values for matching queries.
MIN	The minimum of all of the associated values for matching queries.
MEAN	the mean of all of the associated values for matching queries.
POSITIVE_MEAN	The mean of the positive associated values for the matching queries.

Perform Threat Triage Using the Management Module

You can triage and rank threats by severity using the Management module.

Before you begin

Ensure that the enrichment is working properly.

Procedure

1. On the sensor panel, in the Threat Triage field, click



The screenshot shows two side-by-side configuration panels. The left panel is titled "snort" and contains the following sections:


- NAME ***: A text input field containing "snort".
- Kafka Topic Exists. Emitting**: A green status message.
- PARSER TYPE ***: A dropdown menu with "Snort" selected.
- SCHEMA**: A table showing the number of items for each category:

TRANSFORMATIONS	1
ENRICHMENTS	4
THREAT INTEL	2
- THREAT TRIAGE**: A section with "RULES 1" and a right-pointing arrow.
- Buttons**: "SAVE" (blue), "CANCEL" (grey), and "Advanced" (text).

The right panel is titled "Threat Triage Rules" and contains the following sections:

- AGGREGATOR**: A dropdown menu with "MAX" selected.
- Rules**: Three buttons with colored dots and numbers: a red dot with "0", a yellow dot with "0", and a yellow dot with "1".
- Sort by**: A dropdown menu with "Highest Score" selected.
- Rule List**: A single rule entry with a yellow bar on the left, the number "10", and the text "not(IN_SUBNET(ip_dst_add...)".
- Buttons**: A large blue button with a white "+" sign.

2. To add a rule, click +.

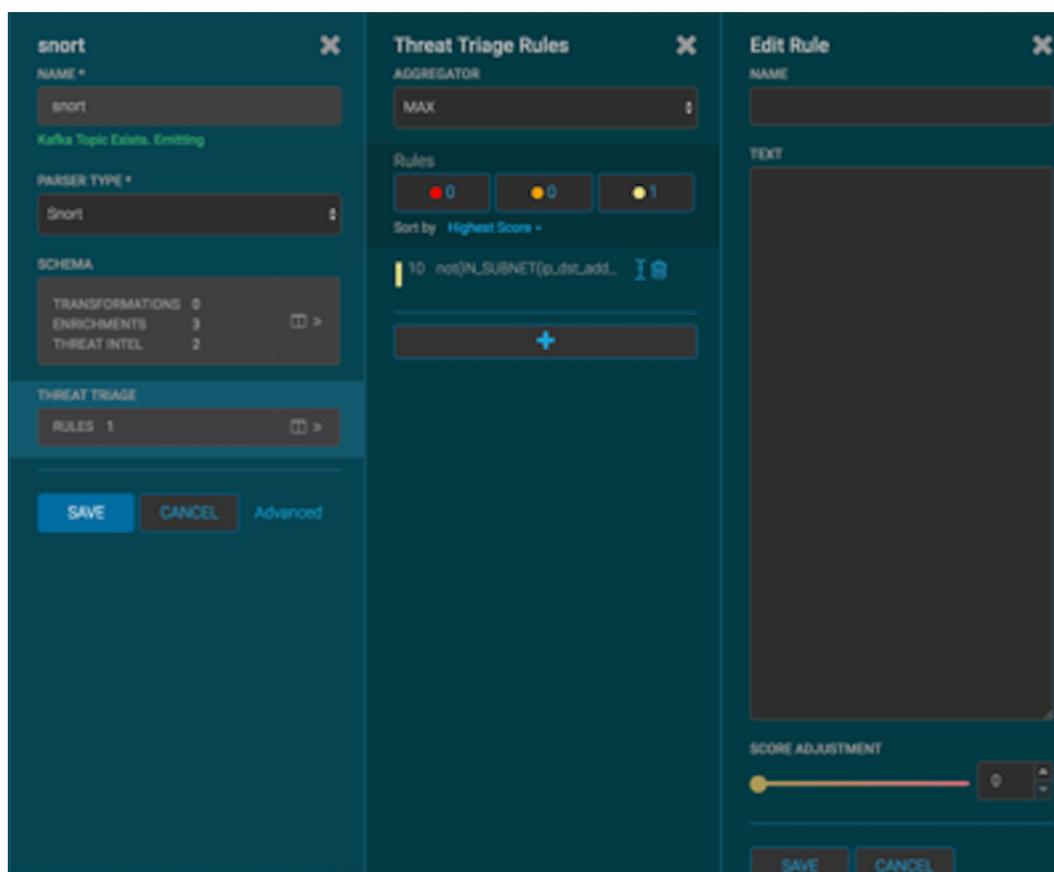

3. Assign a name to the new rule in the NAME field.
4. In the Text field, enter the syntax for the new rule:

```
Exists(IsAlert)
```

5. Use the **SCORE ADJUSTMENT** slider to choose the threat score for the rule.
6. Click **SAVE**.

The new rule is listed in the Threat Triage Rules panel.

7. Choose how you want to aggregate your rules by choosing a value from the Aggregator menu. You can choose among the following:

MAX

The maximum of all of the associated values for matching queries.

MIN

The minimum of all of the associated values for matching queries.

MEAN

The mean of all of the associated values for matching queries.

POSITIVE_MEAN

The mean of the positive associated values for the matching queries.

8. If you want to filter threat triage display, use the **Rules** section and the **Sort by** menu below it. For example, to display only high-level alerts, click the box containing the red indicator. To sort the high-level alerts from highest to lowest, select **Highest Score** from the **Sort by** menu.
9. Click **SAVE**.

Perform Threat Triage Using the CLI

As an alternative to using the HCP Management module to perform threat triage, you can use the CLI.

Procedure

1. Determine the rules you want to implement to prioritize alerts using the configuration guidelines provided in Understanding Threat Triage Rule Configuration.
2. Modify the configuration for the sensor in the enrichment topology.

For example:

```

"trriageConfig" : {
  "riskLevelRules" : [
    {
      "name" : "zeusList is alerted"
      "comment" : "Threat intelligence enrichment type zeusList is alerted."
      "rule":
        "exists(threatintels.hbaseThreatIntel.domain_without_subdomains.zeusList)"
      "score" : 5
    }
    {
      "name" : "Does not end with .com or .net"
      "comment" : "The URL ends with neither .com nor .net."
      "rule": "not(ENDS_WITH(domain_without_subdomains, '.com') or
        ENDS_WITH(domain_without_subdomains, '.net'))" : 10
      "score" : 10
    }
  ]
  , "aggregator" : "MAX"
  , "aggregationConfig" : { }
}

```

3. Log in as root user to the host on which Metron is installed.
4. Modify `$METRON_HOME/config/zookeeper/sensors/$DATASOURCE.json` to match the configuration on disk: Because the configuration in ZooKeeper might be out of sync with the configuration on disk, ensure that they are in sync by downloading the ZooKeeper configuration first:

```

$METRON_HOME/bin/zk_load_configs.sh -m PULL -z $ZOOKEEPER_HOST:2181 -f -o
$METRON_HOME/config/zookeeper

```

5. Validate that the enrichment configuration for the data source exists:

```

cat $METRON_HOME/config/zookeeper/enrichments/$DATASOURCE.json

```

6. In the `$METRON_HOME/config/zookeeper/enrichments/$DATASOURCE.json` file, add the following to the `trriageConfig` section in the threat intelligence section:

```

"threatIntel" : {
  "fieldMap" : {
    "hbaseThreatIntel" : [ "domain_without_subdomains" ]
  },
  "fieldToTypeMap" : {
    "domain_without_subdomains" : [ "zeusList" ]
  },
  "config" : { },
  "trriageConfig" : {
    "riskLevelRules" : {

```

```
"exists(threatintels.hbaseThreatIntel.domain_without_subdomains.zeusList)" :
5
    , "not(ENDS_WITH(domain_without_subdomains, '.com') or
ENDS_WITH(domain_without_subdomains, '.net'))" : 10
    }
    , "aggregator" : "MAX"
    , "aggregationConfig" : { }
    }
}
}
```

7. Ensure that the aggregator field indicates MAX.
8. Push the configuration back to ZooKeeper:

```
$METRON_HOME/bin/zk_load_configs.sh -m PUSH -z $ZOOKEEPER_HOST:2181 -i
$METRON_HOME/config/zookeeper
```

View Triaged or Scored Alerts

You can view triaged alerts in the indexing topic in Apache Kafka or in the triaged alert panel in the HCP Metron dashboard.

An alert in the indexing topic in Kafka looks similar to the following:

```
> THREAT_TRIAGE_PRINT(conf)
#####
# Name # Comment # Triage Rule # Score # Reason #
#####
# Abnormal DNS Port # # source.type == "bro" and protocol == "dns" and
ip_dst_port != 53 # 10 # FORMAT("Abnormal DNS Port: expected: 53, found:
%s:%d", ip_dst_addr, ip_dst_port) #
#####
```

The following shows you an example of a triaged alert panel in the HCP Metron dashboard

Investigation Module Triaged Alert Panel



Time	sourceType	threat.triage.level	full_hostname	ip_src_addr	ip_dst_addr
June 29th 2016, 17:14:30.463	eqid	5	www.actfhaka.com	127.0.0.1	198.50.236.7
June 29th 2016, 17:14:29.196	eqid	5	www.actfhaka.com	127.0.0.1	198.50.236.7
June 29th 2016, 17:14:28.025	eqid	5	www.actfhaka.com	127.0.0.1	198.50.236.7

For URLs from cnn.com, no threat alert is shown, so no triage level is set. Notice the lack of a **threat.triage.level** field.